



CUSTOMISABLE WIRELESS CHARGING SHELVES



BEDSIDE - TABLESIDE - DESKSIDE

Wall-mounted, brandable and configurable charging shelves. Made in Britain, featuring wireless charging pads and a wide choice of customisable modules.

Suitable for all commercial premises and environments.

Increase connectivity, customer satisfaction and dwell time with Crables.



TOUGH HIGH IMPACT SHELL

Polycarbonate/Acrylonitrile Butadiene Styrene (PC/ABS).



UL 94 V-0 Rated, Self Extinguishing within 10 seconds.

UV Stabilised.

CHOOSE YOUR COLOUR

Crables are available in over 300 colours including the RAL P1 and RAL P2 palettes.

Pad Printed logos and branding create your bespoke style and can withstand even the toughest of cleaning chemicals.

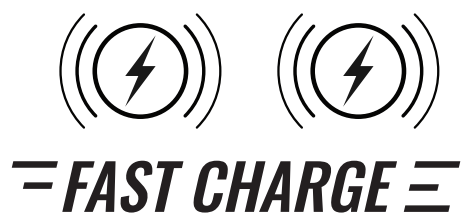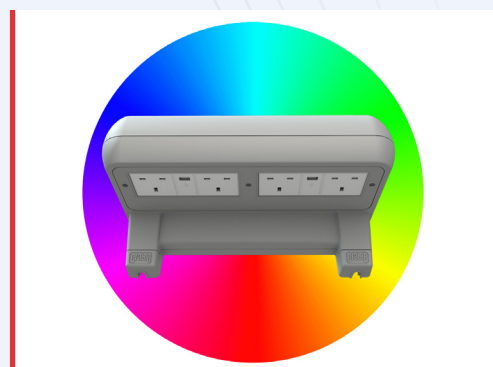

DUAL WIRELESS FAST CHARGING


Two independent wireless charging pads provide up to 15 Watts of Fast Charging to each device.

Compatible with all Qi enabled devices.






OUTPUT PANEL OPTIONS




UK (Type G)
250V a.c. 13A
BS 1363 Part2:1995



European (Type F)
250V a.c. 16A
IEC 60884-1:2006
Plug Type C, E, F
and CEE 7/7



North America (Type B)
127V a.c. 15A
SASO 2204:2003
Plug Type A and B



Australasia (Type I)
250V a.c. 10A
AS/NZS 3112




Single USB Charging
USB A or USB C
12W capacity



Dual USB Charging
USB A or USB C
12W capacity




1 W LED Downlight with
on/off switch
Cool White, Warm White,
Blue

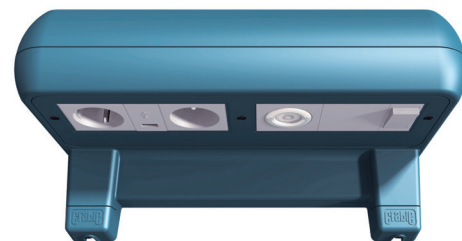

PLUGS OF THE WORLD

DISCOVER HOW CABLES CAN CONNECT
YOUR CUSTOMERS AT CABLE.CO.UK

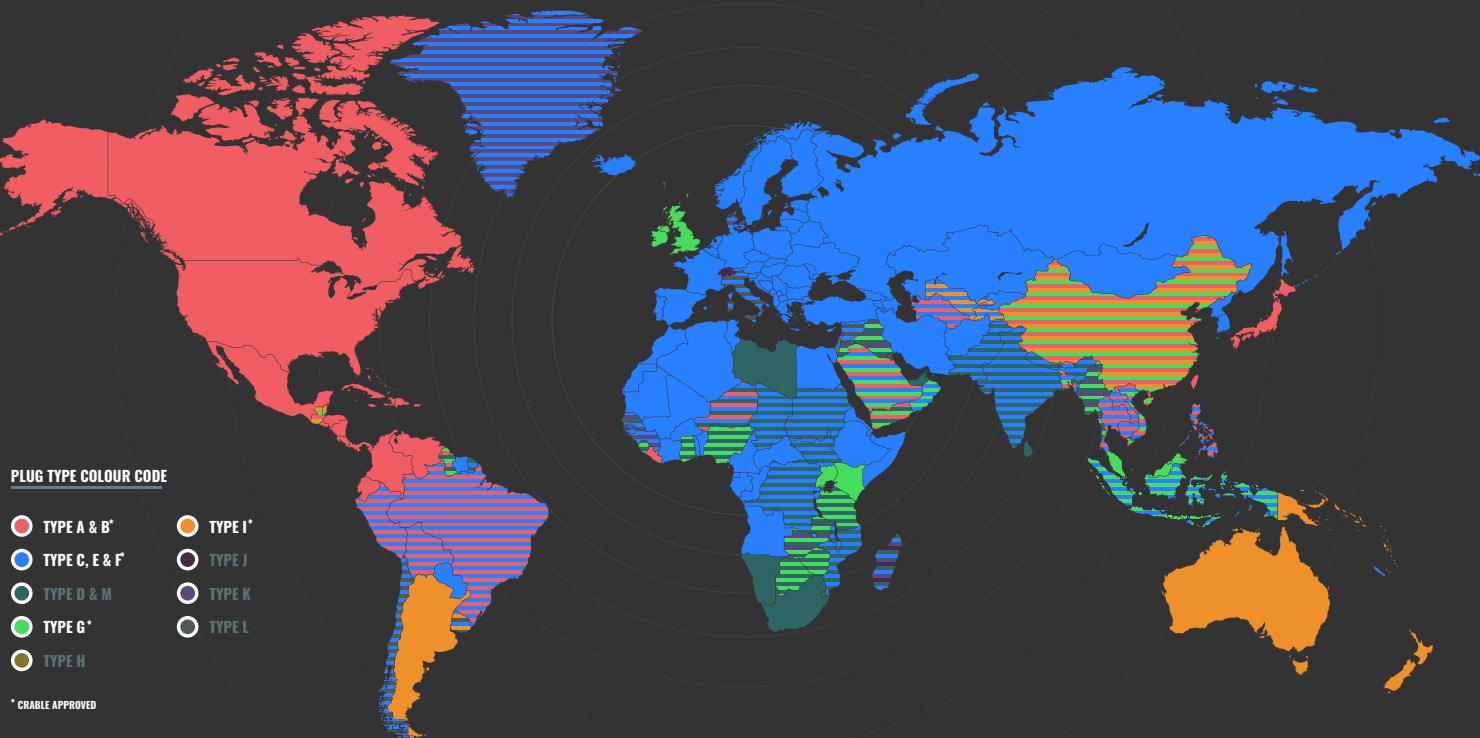




SPECIFICATIONS

Shell Material	Polycarbonate/Acrylonitrile Butadiene Styrene (PC/ABS) UL 94 V-0 Rated Self Extinguishing within 10 seconds UV Stabilised
Dimensions (WxHxD)	340mm x 150mm x 155mm
Weight	1.4Kg average (subject to configuration)
Supporting Weight	20Kg (Indirect 80Kg) when correctly installed
Operating Temperature	0°C to 50°C
Ingress Protection	IP 43
Impact Protection	IK 7
Available Colours	Over 300 colours including RAL P2 palette
Logos/Branding	Pad Printed
Supply Voltage	230v-240v ~ 50/60Hz
Current Rating	13A (UK) 16A (US) 15A (EU)
Wireless Charging	Compatible with all Qi enabled devices 5W, 7.5W, 10W and 15W Fast Charging modes
USB Charging	12W charging capacity
Dual USB	Shared 12W charging capacity
UK Outlet (Type G)	250V a.c. 13A BS 1363 Part2:1995
Euro (Type E)	250V a.c. 16A IEC 60884-1:2006
Euro (Type F)	250V a.c. 16A NF C 61-314
North America (Type B)	127V a.c. 15A SASO 2204:2003 note: Type B outlet IPx3
Australasia (Type I)	250V a.c. 10A AS/NZS 3112 note: Type I outlet IPx3
Approvals	CE Certified ISO/IEC 17050-1:2004 IEC 60670-1:2002 +A1:2011 BS 5733:2010 +A1:2014 IEC 60884-1:2002 +A1:2006 +A2:2013 EN 55022 (CISPR22) EN 61000 EN 55024 EN 50581:2012 EN 60529:1992 +A2:2013 EN 62262:2002





DIMENSIONS & ORDERING INFORMATION

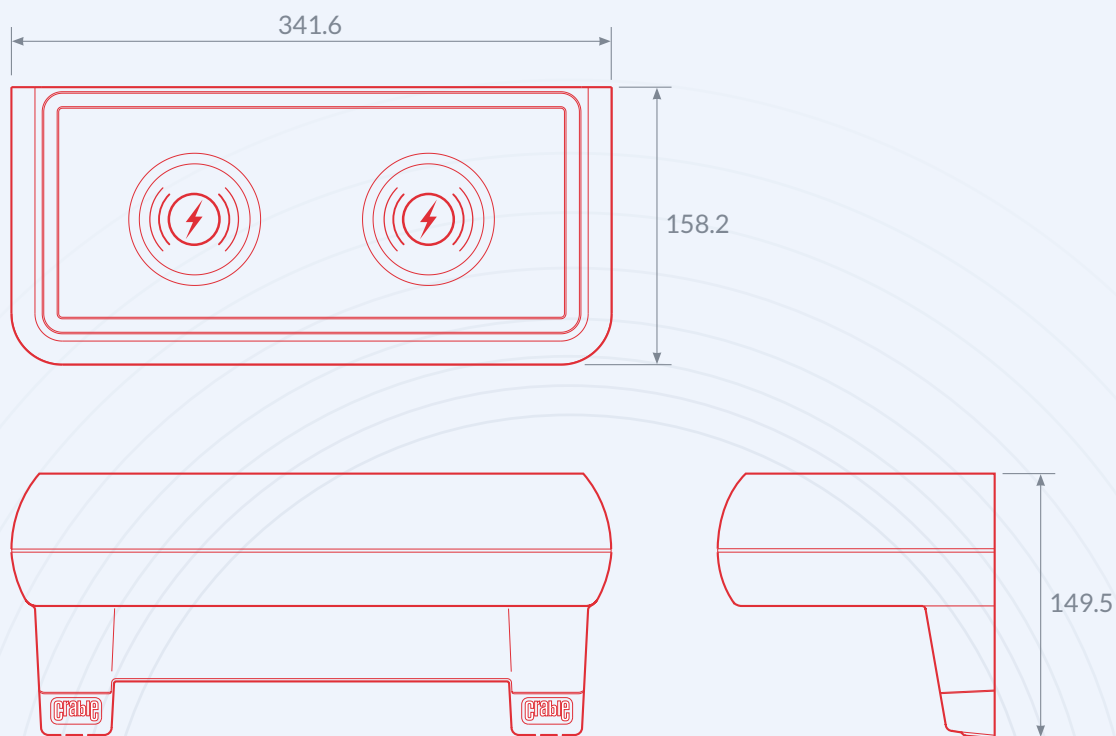

PRODUCT CODES

CRA15

SERIES INDICATOR

CRA15 = Shelf Station with 2x 15 Watt wireless chargers

1021

COLOUR

4 digit RAL number
0 = default black

A

USB CHARGERS

0 = none
A = USB A
C = USB C

eg. 2A = 2x USB A
AC = 1x USB A + 1x USB C

W

1 WATT LED

0 = None
W = Warm
C = Cool
B = Blue

GGGF

SOCKETS

0 = none
B = North America
F = SCHUKO
G = UK
I = Australasia

1021

ARTWORK

Cable allocated reference for personalised artwork

note - option B cannot be used with any other type

